

539,948

Rec'd PCT/PTO 17 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number
WO 2004/054414 A1

(51) International Patent Classification⁷: **A47J 36/24**
(21) International Application Number:
PCT/GB2003/005476

(22) International Filing Date:
16 December 2003 (16.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0229302.5 17 December 2002 (17.12.2002) GB

(71) Applicant and

(72) Inventor: ANDERSON, Keith, John [GB/GB]; 16 Braemar Drive, Dunfermline, Fife KY11 8ES (GB).

(74) Agents: MACDOUGALL, Donald, Carmichael et al.; Cruikshank & Fairweather, 19 Royal Exchange Square, Glasgow G1 3AE (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A HEATING DEVICE FOR A FEEDING BOTTLE

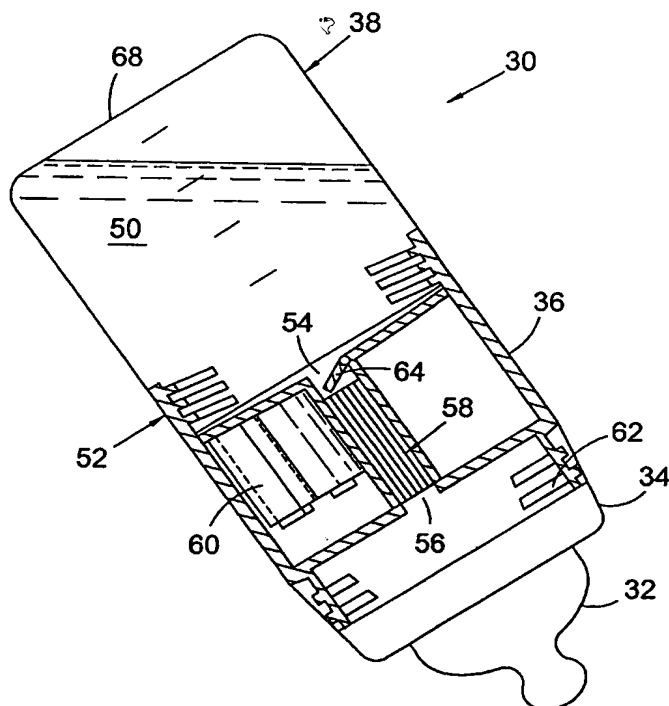

(57) Abstract: A heating device (10, 36, 110), adapted for use with an infant's feeding bottle for heating a flow of liquid feed. The device can be releasably connected to the feeding bottle and includes an inlet (14, 114) for receiving a flow of liquid feed from the feeding bottle, and outlet (16, 116), for permitting the flow of liquid feed to leave the device, the outlet being in fluid communication with the inlet. The device (10, 36, 110) further includes means for heating (18, 122) the liquid feed as it flows between the inlet and outlet such that a flow of liquid feed from the feeding bottle through the device leaves the device through the outlet means at an elevated temperature.

WO 2004/054414 A1